




Drop Forged Swivels

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT. Read important warnings and information preceding fittings section. SWIVELS ARE NOT INTENDED TO ROTATE UNDER LOAD

Jaw & Eye Swivels

Hot Galvanized


Size (A)	Working Load Limits in Pounds	Approx. Wt. Each in Pounds	Dimensions in Inches					
			B	C	D	E	F	G
1/4"	850	0.22	.69	.75	.38	.88	2.69	.25
5/16"	1,250	0.39	.88	1.00	.50	.88	2.88	.31
3/8"	2,250	0.71	.94	1.25	.63	1.00	3.50	.38
1/2"	3,600	1.40	1.38	1.50	.81	1.31	4.50	.50
5/8"	5,200	2.30	1.63	1.75	1.00	1.50	5.31	.63
3/4"	7,200	3.50	1.75	2.00	1.19	1.75	6.06	.75

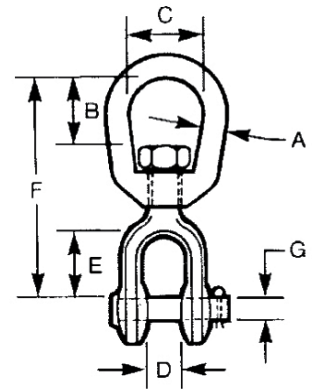

Eye & Eye Swivels

Hot Galvanized

Size (A)	Working Load Limits in Pounds	Approx. Wt. Each in Pounds	Dimensions in Inches			
			B	C	E	F
1/4"	850	0.20	.69	.75	.94	2.88
5/16"	1,250	0.38	.75	1.00	1.13	3.63
3/8"	2,250	.68	.94	1.25	1.38	4.25
1/2"	3,600	1.4	1.38	1.50	1.94	5.63
5/8"	5,200	2.5	1.63	1.75	2.31	6.63
3/4"	7,200	3.8	1.81	2.00	2.56	7.25

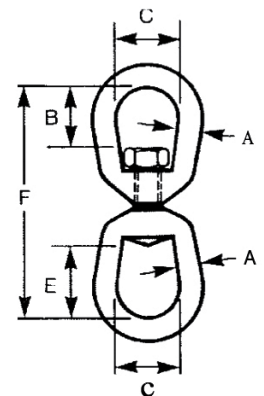



Drop Forged Swivels

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT. Read important warnings and information preceding fittings section. SWIVELS ARE NOT INTENDED TO ROTATE UNDER LOAD

Eye Nuts

Hot Galvanized and self colored.

Trade Size	Working Load Limits in Pounds	Tap	Bail Size (A)	Approx. Wt. Each in Pounds	Dimensions in Inches				
					B	C	D	E	F
#1	520	1/4" - 20"	1/4"	.08	1.06	.75	.66	1.69	1.25
#2	1,250	3/8" - 16	5/16"	.15	1.19	1.00	.81	2.13	1.63
#3A	2,250	1/2" - 13	3/8"	.27	1.44	1.25	1.00	2.56	2.06
#4	3,600	5/8" - 11	1/2"	.57	1.88	1.50	1.25	3.25	2.50
#5	5,200	3/4" - 10	5/8"	.97	2.50	1.75	1.38	4.00	3.00
#6	7,200	7/8" - 9	3/4"	1.69	2.50	2.00	1.63	4.44	3.50
#6A	7,200	1" - 8	3/4"	1.69	2.50	2.00	1.63	4.44	3.50

